

Mr. Danny Sharpe  
Base Maintenance Division  
Camp Lejeune, NC 28542


*Envelope Address*



From: D. SHAYE  
To: Environmental  
Engineer

for info.

Danno

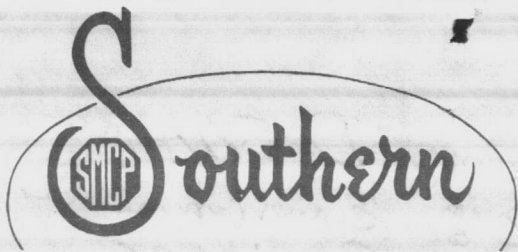

**MILL CREEK PRODUCTS COMPANY, INC.**

GA. TOLL FREE (800) 282-1637 \_\_\_ S.E. TOLL FREE (800) 241-8752  
ATLANTA (404) 355-6583

**Insecticides, Industrial Herbicides  
& Application Equipment**

P.O. BOX 20056 • 1335 CHATTAHOOCHEE AVE. N.W. • ATLANTA, GEORGIA 30325



Ronald H. Levine, M.D., M.P.H.  
STATE HEALTH DIRECTOR

DIVISION OF HEALTH SERVICES  
P.O. Box 2091  
Raleigh, N.C. 27602-2091

December 13, 1983

Richard W. Vanderpool, Jr.  
South Insulation Co.  
P. O. Box 1745  
Wilson, NC 27893

Re: Disposal of Asbestos From Building Number M-324 Camp Johnson, at  
Camp Lejeune Landfill

Dear Mr. Vanderpool:


The Division of Health Services has no objection to disposal of asbestos waste in permitted sanitary landfills if performed in accordance with 40 CFR Part 61. The following procedures should be followed:

1. Permission from the owner/operator of the landfill should be obtained prior to delivery since the owner/operator has the right to deny acceptance of any waste.
2. A copy of this letter should accompany the waste at time of disposal.
3. The waste is placed wet into plastic bags and securely sealed to prevent an airborne condition during handling.
4. The operator shall be notified that the waste is to be covered immediately with sufficient amounts of dirt or other waste so as to prevent an airborne condition during final disposal.
5. The operator shall place the waste as far from the top of the landfill as possible, but in no case within ten (10) feet of the landfill surface.

The preparation of the asbestos and delivery should comply with OSHA and DOT standards.

If you have questions concerning this matter, please advise.

Sincerely,

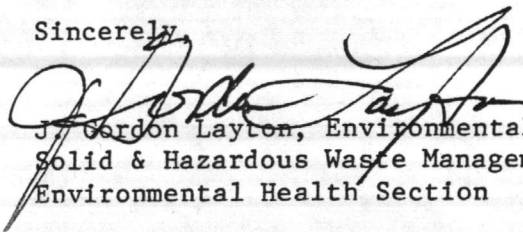  
J. Gordon Layton, Environmental Engineer  
Solid & Hazardous Waste Management Branch  
Environmental Health Section

JGL:dws

cc: Ray Church  
Camp Lejeune Landfill ✓

