

COST ESTIMATE

DATE PREPARED
4-1-87

SHEET OF

ACTIVITY AND LOCATION

902

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

PROJECT TITLE

ESTIMATED BY

Huffman

CATEGORY CODE NUMBER


RPL PLBG FIXTURES AND PIPING

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
<i>DEMO ALL ASBESTOS INSULATION ON POTABLE WATER AND STEAM PIPING TO ALL HEADS (5) AND STEAM MECH. ROOM AND POTABLE WATER PIPING.</i>				<i>500</i>		<i>5,000</i>		<i>5,500</i>
<i>REPLACE ALL POTABLE WATER PIPING AND INSULATE TO AND SUPPLYING ALL HEADS INCLUDING FROM 1ST PIPE JOINT AND MAIN VALVE IN MECH. ROOM. INSULATE STEAM PIPING WHERE ASBESTOS WAS REMOVED</i>				<i>1,850</i>		<i>4,800</i>		<i>6,650</i>

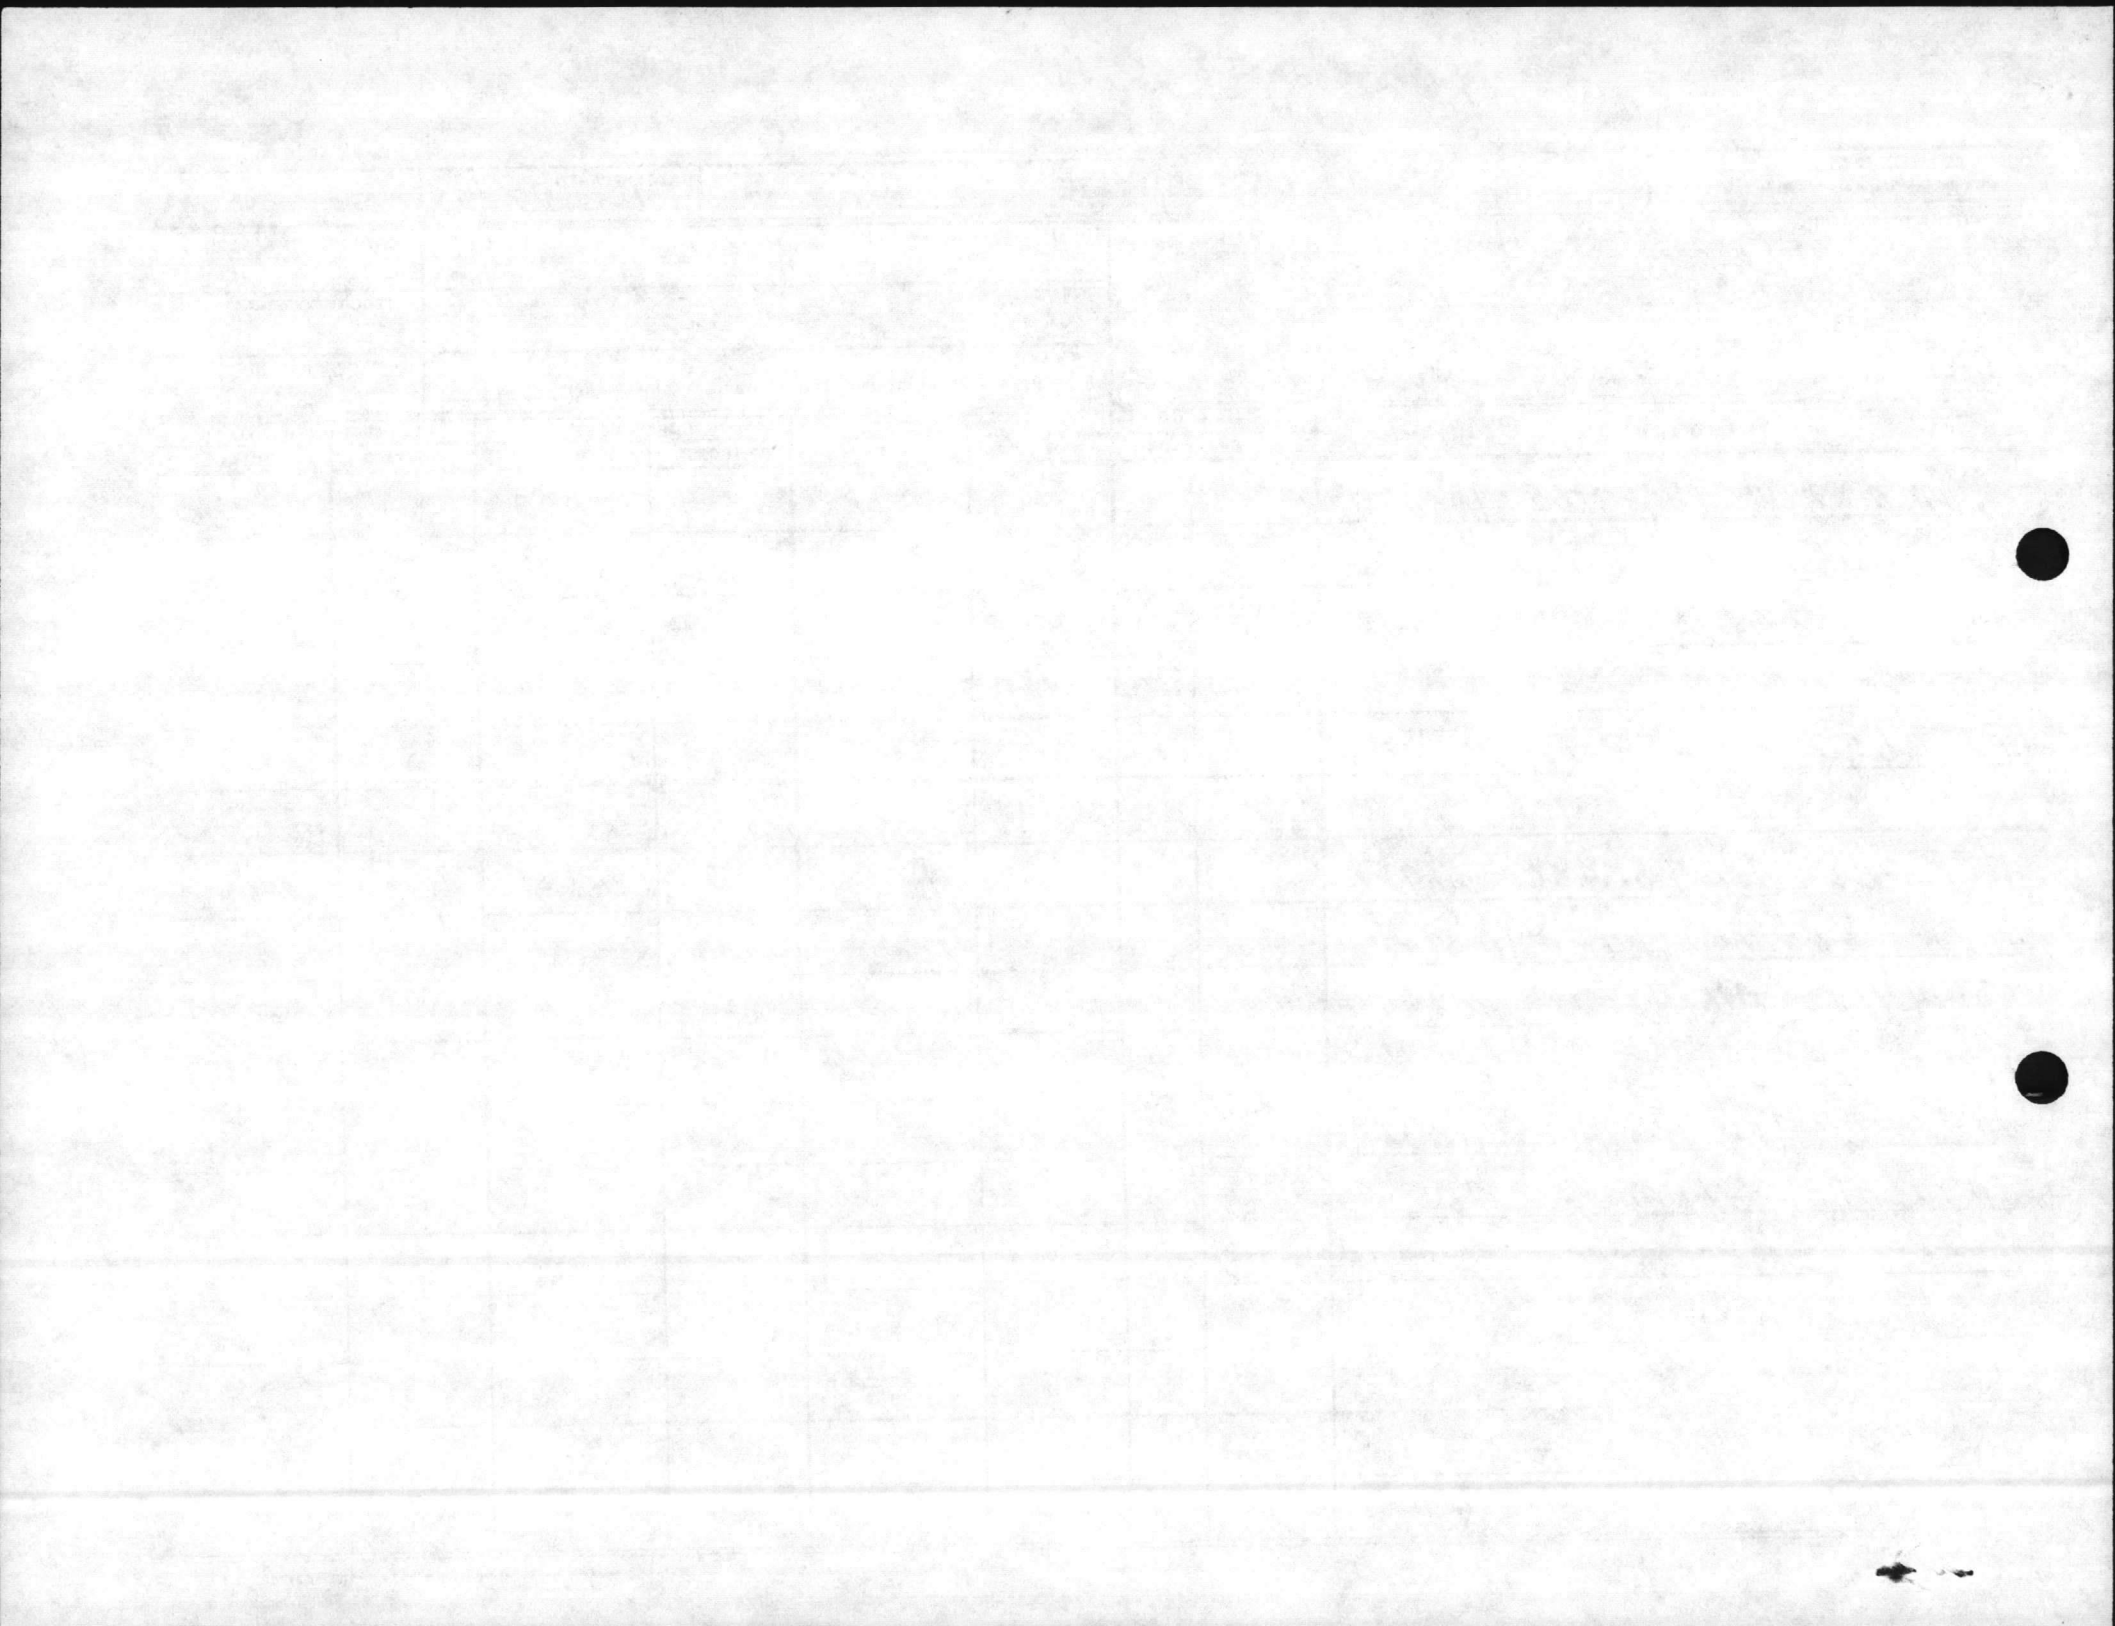

COST ESTIMATE

DATE PREPARED
4-1-87

SHEET **OF**

ACTIVITY AND LOCATION

902

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

PROJECT TITLE

RPT PLBG. FIXTURES AND PIPING

ESTIMATED BY

Huffman


CATEGORY CODE NUMBER

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
<i>THROUGH ALL HEADS</i>				<i>7,640</i>		<i>3,500</i>		<i>1,140</i>
<i>REPLACE ALL PLUMBING FIXTURES,</i>								
<i>VALUES AND TRIM WITH STATE</i>								
<i>OF THE ART AS PER N.P.C.</i>								
<i>REPLACE SHOWER STALLS WITH</i>								
<i>MASONRY AND CERAMIC TILE</i>								
<i>TYPE. REPLACE ALL TROUGH</i>								
<i>URINALS WITH WALL HUNG BACK</i>								
<i>OUT DRAIN WITH INDIVIDUAL</i>								
<i>FLUSH VALVES, REPLACE</i>								
<i>HOSE BIBBS,</i>								

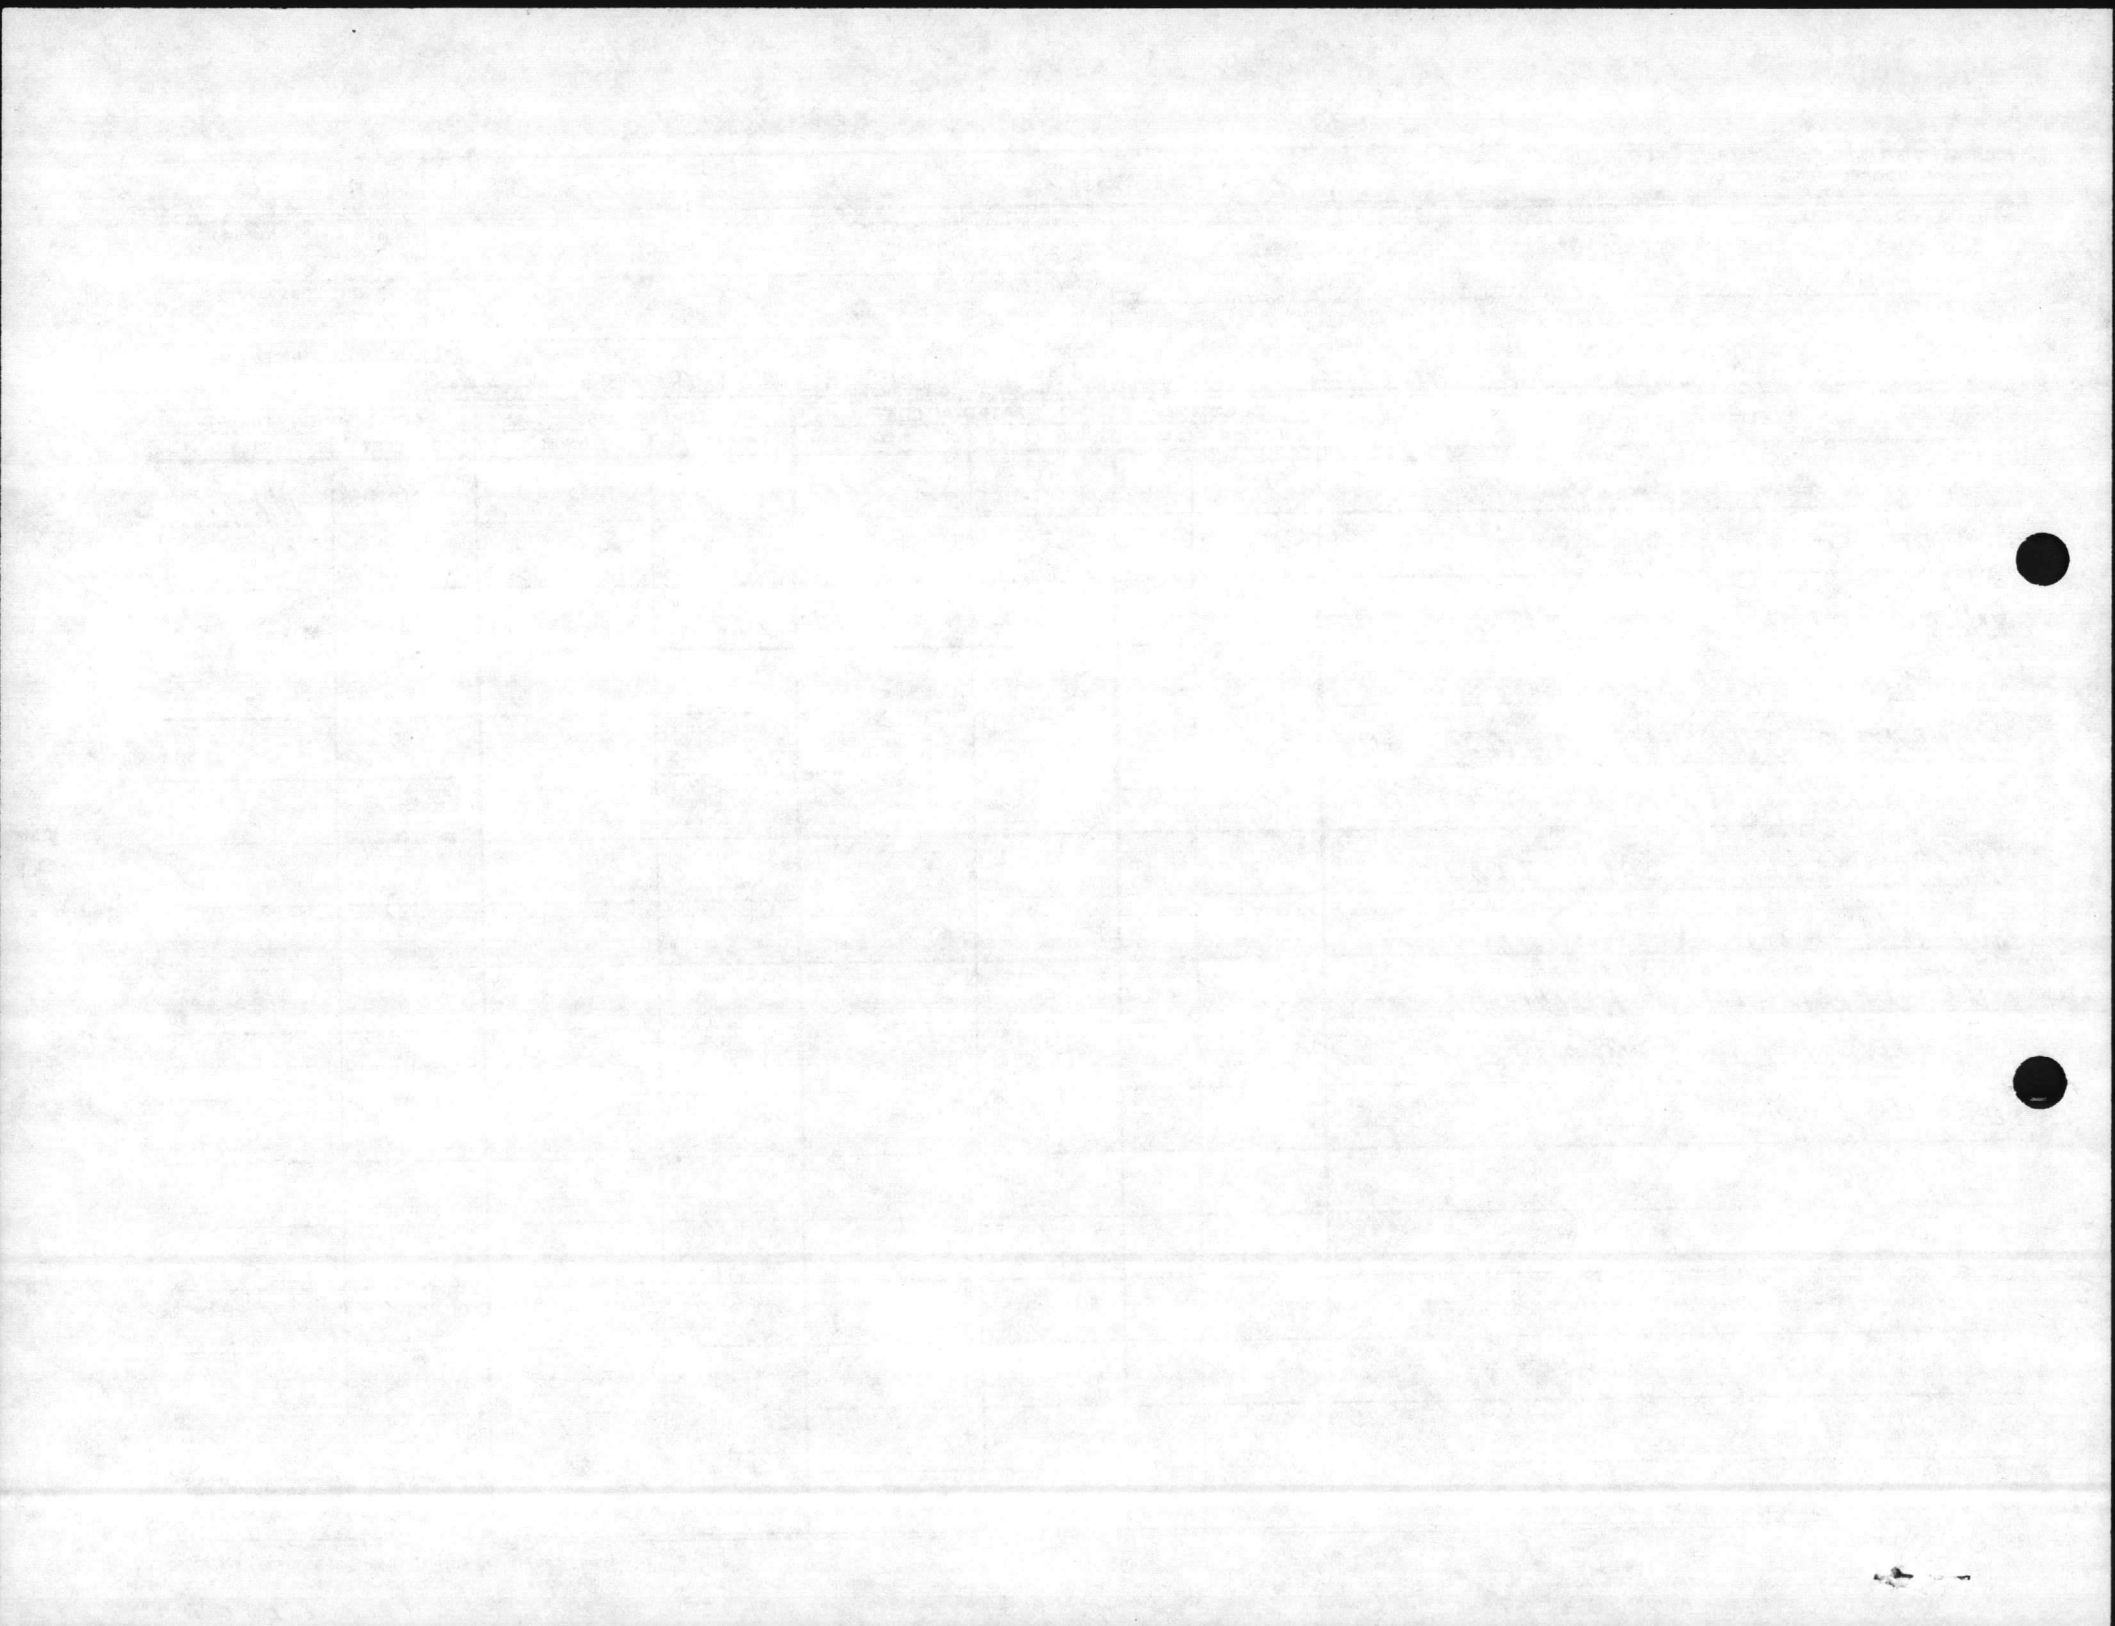

COST ESTIMATE

DATE PREPARED
 4-1-87

SHEET OF

ACTIVITY AND LOCATION

902

CONSTRUCTION CONTRACT NO.

IDENTIFICATION NUMBER

PROJECT TITLE

RPL PLB FIXTURES AND PIPING

ESTIMATED BY

Huffman

CATEGORY CODE NUMBER

STATUS OF DESIGN

PED 30% 100% FINAL Other (Specify)

JOB ORDER NUMBER

ITEM DESCRIPTION	QUANTITY		MATERIAL COST		LABOR COST		ENGINEERING ESTIMATE	
	NUMBER	UNIT	UNIT COST	TOTAL	UNIT COST	TOTAL	UNIT COST	TOTAL
IN ENGINEER MAINTENANCE				1400		800		1200
HEADS LOWER EXISTING								
STEAM UNIT HEATER AND ADD								
DNE UNIT HEATER TO								
ACCOMADATE NEW DROP								
CIELINGS. EACH HEATER TO								
HAVE SEPERATE THERMOSTATS.								
REPLACE ALL GALVINIZED				1200		1200		2400
AND/OR STEEL WASTE AND								
VENT PIPING. MODIFY ALL								
PIPING AS REQUIRED FOR								
CERAMIC FLOORS AND WALLS								
INCLUDING FLOOR DRAINS. WHERE								
NO FLOOR DRAINS EXIST ADD								
DNE FLOOR DRAIN PER HEAD.								
MODIFY PIPING FOR URNIALS.								

TOTAL

11590

15200

11000

