

Lower Snake River Juvenile Salmon Migration Feasibility Report/ Environmental Impact Statement

APPENDIX S
Snake River Maps

FEASIBILITY STUDY DOCUMENTATION

Document Title

Lower Snake River Juvenile Salmon Migration Feasibility Report/Environmental Impact Statement

Appendix A (bound with B) Anadromous Fish Modeling

Appendix B (bound with A) Resident Fish
Appendix C Water Quality

Appendix D Natural River Drawdown Engineering

Appendix E Existing Systems and Major System Improvements Engineering

Appendix F (bound with G, H) Hydrology/Hydraulics and Sedimentation

Appendix G (bound with F, H) Hydroregulations

Appendix H (bound with F, G) Fluvial Geomorphology

Appendix I Economics

Appendix J Plan Formulation Appendix K Real Estate

Appendix L (bound with M) Lower Snake River Mitigation History and Status Appendix M (bound with L) Fish and Wildlife Coordination Act Report

Appendix N (bound with O, P) Cultural Resources

Appendix O (bound with N, P) Public Outreach Program

Appendix P (bound with N, O) Air Quality

Appendix Q (bound with R, T) Tribal Consultation and Coordination

Appendix R (bound with Q, T) Historical Perspectives
Appendix S* Snake River Maps

Appendix T (bound with R, Q) Clean Water Act, Section 404(b)(1) Evaluation

Appendix U Response to Public Comments

*Appendix S, Lower Snake River Maps, is bound separately (out of order) to accommodate a special 11 x 17 format.

The documents listed above, as well as supporting technical reports and other study information, are available on our website at http://www.nww.usace.army.mil/lsr. Copies of these documents are also available for public review at various city, county, and regional libraries.

STUDY OVERVIEW

Purpose and Need

Between 1991 and 1997, due to declines in abundance, the National Marine Fisheries Service (NMFS) made the following listings of Snake River salmon or steelhead under the Endangered Species Act (ESA) as amended:

- sockeye salmon (listed as endangered in 1991)
- spring/summer chinook salmon (listed as threatened in 1992)
- fall chinook salmon (listed as threatened in 1992)
- steelhead (listed as threatened in 1997).

In 1995, NMFS issued a Biological Opinion on operations of the Federal Columbia River Power System (FCRPS). Additional opinions were issued in 1998 and 2000. The Biological Opinions established measures to halt and reverse the declines of ESA-listed species. This created the need to evaluate the feasibility, design, and engineering work for these measures.

The Corps implemented a study (after NMFS' Biological Opinion in 1995) of alternatives associated with lower Snake River dams and reservoirs. This study was named the Lower Snake River Juvenile Salmon Migration Feasibility Study (Feasibility Study). The specific purpose and need of the Feasibility Study is to evaluate and screen structural alternatives that may increase survival of juvenile anadromous fish through the Lower Snake River Project (which includes the four lowermost dams operated by the Corps on the Snake River—Ice Harbor, Lower Monumental, Little Goose, and Lower Granite Dams) and assist in their recovery.

Development of Alternatives

The Corps' response to the 1995 Biological Opinion and, ultimately, this Feasibility Study, evolved from a System Configuration Study (SCS) initiated in 1991. The SCS was undertaken to evaluate the technical, environmental, and economic effects of potential modifications to the configuration of Federal dams and reservoirs on the Snake and Columbia Rivers to improve survival rates for anadromous salmonids.

The SCS was conducted in two phases. Phase I was completed in June 1995. This phase was a reconnaissance-level assessment of multiple concepts including drawdown, upstream collection, additional reservoir storage, migratory canal, and other alternatives for improving conditions for anadromous salmonid migration.

The Corps completed a Phase II interim report on the Feasibility Study in December 1996. The report evaluated the feasibility of drawdown to natural river levels, spillway crest, and other improvements to existing fish passage facilities.

Based in part on a screening of actions conducted for the Phase I report and the Phase II interim report, the study now focuses on four courses of action:

- Existing Conditions
- Maximum Transport of Juvenile Salmon

- Major System Improvements
- Dam Breaching.

The results of these evaluations are presented in the combined Feasibility Report (FR) and Environmental Impact Statement (EIS). The FR/EIS provides the support for recommendations that will be made regarding decisions on future actions on the Lower Snake River Project for passage of juvenile salmonids. This appendix is a part of the FR/EIS.

Geographic Scope

The geographic area covered by the FR/EIS generally encompasses the 140-mile long lower Snake River reach between Lewiston, Idaho and the Tri-Cities in Washington. The study area does slightly vary by resource area in the FR/EIS because the affected resources have widely varying spatial characteristics throughout the lower Snake River system. For example, socioeconomic effects of a permanent drawdown could be felt throughout the whole Columbia River Basin region with the most effects taking place in the counties of southwest Washington. In contrast, effects on vegetation along the reservoirs would be confined to much smaller areas.

Identification of Alternatives

Since 1995, numerous alternatives have been identified and evaluated. Over time, the alternatives have been assigned numbers and letters that serve as unique identifiers. However, different study groups have sometimes used slightly different numbering or lettering schemes and this has led to some confusion when viewing all the work products prepared during this long period. The primary alternatives that are carried forward in the FR/EIS currently involve the following four major courses of action:

Alternative Name	PATH ^{1/} Number	Corps Number	FR/EIS Number
Existing Conditions	A-1	A-1	1
Maximum Transport of Juvenile Salmon	A-2	A-2a	2
Major System Improvements	A-2'	A-2d	3
Dam Breaching	A-3	A-3a	4

^{1/} Plan for Analyzing and Testing Hypotheses

Summary of Alternatives

The **Existing Conditions Alternative** consists of continuing the fish passage facilities and project operations that were in place or under development at the time this Feasibility Study was initiated. The existing programs and plans underway would continue unless modified through future actions. Project operations include fish hatcheries and Habitat Management Units (HMUs) under the Lower Snake River Fish and Wildlife Compensation Plan (Comp Plan), recreation facilities, power generation, navigation, and irrigation. Adult and juvenile fish passage facilities would continue to operate.


The **Maximum Transport of Juvenile Salmon Alternative** would include all of the existing or planned structural and operational configurations from the Existing Conditions Alternative. However, this alternative assumes that the juvenile fishway systems would be operated to maximize fish transport from Lower Granite, Little Goose, and Lower Monumental and that voluntary spill would not be used to bypass fish through the spillways (except at Ice Harbor). To accommodate this maximization of transport, some measures would be taken to upgrade and improve fish handling facilities.

The Major System Improvements Alternative would provide additional improvements to what is considered under the Existing Conditions Alternative. These improvements would be focused on using surface bypass facilities such as surface bypass collectors (SBCs) and removable spillway weirs (RSWs) in conjunction with extended submerged bar screens (ESBSs) and a behavioral guidance structure (BGS). The intent of these facilities would be to provide more effective diversion of juvenile fish away from the turbines. Under this alternative, an adaptive migration strategy would allow flexibility for either in-river migration or collection and transport of juvenile fish downstream in barges and trucks.

The **Dam Breaching Alternative** has been referred to as the "Drawdown Alternative" in many of the study groups since late 1996 and the resulting FR/EIS reports. These two terms essentially refer to the same set of actions. Because the term drawdown can refer to many types of drawdown, the term dam breaching was created to describe the action behind the alternative. The Dam Breaching Alternative would involve significant structural modifications at the four lower Snake River dams, allowing the reservoirs to be drained and resulting in a free-flowing yet controlled river. Dam breaching would involve removing the earthen embankment sections of the four dams and then developing a channel around the powerhouses, spillways, and navigation locks. With dam breaching, the navigation locks would no longer be operational and navigation for large commercial vessels would be eliminated. Some recreation facilities would close while others would be modified and new facilities could be built in the future. The operation and maintenance of fish hatcheries and HMUs would also change, although the extent of change would probably be small and is not known at this time.

Authority

The four Corps dams of the lower Snake River were constructed and are operated and maintained under laws that may be grouped into three categories: 1) laws initially authorizing construction of the project, 2) laws specific to the project passed subsequent to construction, and 3) laws that generally apply to all Corps reservoirs.

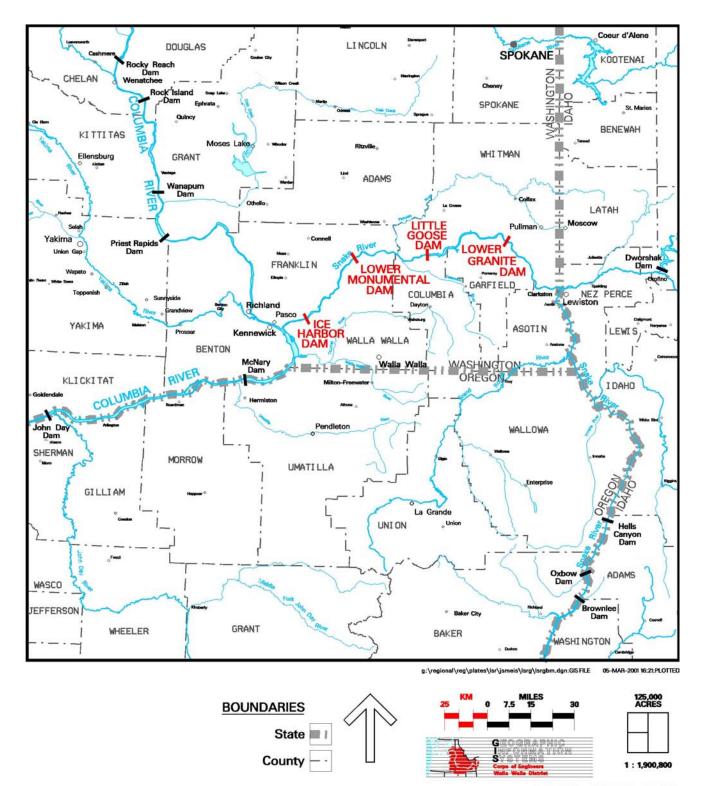

LOWER SNAKE RIVER Juvenile Salmon Migration Feasibility Study

REGIONAL BASE MAP



Final Lower Snake River Juvenile Salmon Migration Feasibility Report/ Environmental Impact Statement

Appendix S Snake River Maps

Produced by
U.S. Army Corps of Engineers
Walla Walla District

February 2002

FOREWORD

Appendix S was prepared by the U.S. Army Corps of Engineers (Corps), Walla Walla District. This appendix is one part of the overall effort of the Corps to prepare the Lower Snake River Juvenile Salmon Migration Feasibility Report/Environmental Impact Statement (FR/EIS).

The Corps has reached out to regional stakeholders (Federal agencies, tribes, states, local governmental entities, organizations, and individuals) during the development of the FR/EIS and appendices. This effort resulted in many of these regional stakeholders providing input and comments, and even drafting work products or portions of these documents. This regional input provided the Corps with an insight and perspective not found in previous processes. A great deal of this information was subsequently included in the FR/EIS and appendices; therefore, not all of the opinions and/or findings herein may reflect the official policy or position of the Corps.

CONTENTS

1.	Intro	duction	S1-1
2.	Mapp	ping Products	S2-1
	2.1 2.2	1934 Survey Drawings Aerial Photography	S2-1 S2-2
3.	Map	Presentations	S3-1
	3.1 3.2	Survey Drawing Displays Pre- and Post-Dam Comparison Displays	S3-1 S3-1
Anne		1934 Survey Drawings: Sheet Numbers 1 Through 131 and Overview Sheet Pre- and Post-Dam Comparison Displays	
		TABLES	
Tabl	e 2-1.	Aerial Flight Information	S2-3

ACRONYMS AND ABBREVIATIONS

3-D three dimensional dpi dots per inch

GIS geographic information system LSRP Lower Snake River Project

NGVD29 National Geodetic Vertical Datum 1929

RM River Mile USE U.S. Engineer

1. Introduction

This appendix is intended to share maps and aerial photo displays of the Lower Snake River Project (LSRP). These presentations give the reader insight into the LSRP prior to dam construction (before 1961) and after dam construction (after 1975).

2. Mapping Products

2.1 1934 Survey Drawings

Documented surveys with depth-soundings on the LSRP were first conducted in the late 1800s. Only two depth-sounding surveys cover the entire LSRP and these were completed in 1917 and 1934. The 1934 survey was chosen for this appendix because it contains much more detail. Since 1934, depth-sounding surveys were conducted only on selected areas within the LSRP. The figures in this appendix are from the original linen drawings.

2.1.1 Type of Data

The survey drawings are a collection of 155 sheets covering 176 river miles, beginning at the mouth of the Snake River (River Mile 0.0) and were originally drawn at the scale of 1:2,000.

The 1934 drawings include the following information:

- topographic contours (5 foot)
- shoreline
- ground descriptions (grass, sand, cultivated)
- sounding depths
- depth contours (6 and 9 foot)
- proposed navigation channel centerline
- northing/easting and longitude/latitude tick marks
- U.S. Engineer (U.S.E.) bench marks
- river miles (not the same as reservoir river miles)

- roads and railroads
- substrate information
- islands
- low water elevation marks
- buildings
- rapids (average and maximum velocity)
- spot elevations
- monument stations

2.1.2 Original Purpose

The drawings are taken from a larger report entitled *Review Report, Snake River, Washington-Idaho, Mouth to Oregon-Washington Line*, dated June 10, 1935, by the U.S. Engineer Office, Portland, Oregon. Sounding data was taken to determine a proposed navigation channel, document the topography, and site locations of rapids.

2.1.3 Survey Components

The method of survey is not known because the associated report or other documentation was not found with the drawings. The original maps were prepared on linen media. Notes on the drawings identify the following creation specifics:

- Elevations are referred to as National Geodetic Vertical Datum 1929 (NGVD29) (U.S.C and G.S. Datum 1929 adjustment).
- Soundings are in feet and tenths and show depths at adopted low water plane (based on 0.0 at U.S. Weather Bureau gage at Riparia, El 512.05 NGVD29).
- Figures in parentheses indicate height in feet above low water (for example, 1.7).

- Contour interval is 5 feet.
- Distance in miles from mouth of river is measured on the centerline of the proposed channel.

2.1.4 Electronic Conversions and Processing

In 1998 the Walla Walla District converted the 1934 drawings to 3-D geographic information system (GIS) files. At the same time the approximately 126,000 sounding points (depth of river) were also converted into 3-D GIS files with horizontal and vertical values. The drawings were scanned at 200 dots per inch (dpi). Longitude and latitude tick mark information was taken from the drawings, inputted into files, and labeled. During data verification of the longitude and latitude tick mark locations, the tick marks were found not to match current coordinate systems, so drawings do not correctly overlay current topographic data. Images were geographically referenced into position using the longitude and latitude locations from the drawings. The raster line work was then converted into 3-D vector data with each reservoir reach as the upper and lower boundary for that section of the river.

2.2 Aerial Photography

2.2.1 1956 to 1962

Aerial photography flown between 1956 and 1962 was stereoplotted to develop topographic mapping. The topographic mapping was used to geographically reference the 1958 aerial photography that represents the pre-project condition for the LSRP. See Table 2.1 for aerial flight details.

2.2.2 1958, 1991, and 1992

Aerial photography was flown in 1958, 1991, and 1992 for the purpose of recording what the river looked like during that time period. The 1958 aerial flight documents the appearance of the lower Snake River prior to dam construction. The 1991 and 1992 flights provide information used in managing recreation areas and wildlife habitat units within the boundaries of the LSRP. See Table 2.1 for aerial flight details.

Table 2-1. Aerial Flight Information

Description	Roll Number	Date Flown	Scale	% Overlap	Control
Description	1 (unito el	110 (// 11	Scure	70 0 veriup	Control
1956 Snake River					
Snake River Mouth to Riparia	W56-52V	14 Sep	1:20,700	60	Yes
1957 Snake River					
Lake Herbert G. West	W57-70V	10 Sep	1:9,600	60	Yes
Lake Herbert G. West	W57-71V	12 Oct	1:9,600	60	Yes
1958 Snake River					
Low Water — RM 10 to Johnson Bar	W58-74V	28 Aug	1:10,000	Minimum	No
Low Water — RM 10 to Johnson Bar	W58-75V	28 Aug	1:10,000	Minimum	No
1959 Snake River					
Lake Bryan	W59-93V	2 Nov	1:9,600	60	Yes
Lake Bryan	W59-94V	6 Nov	1:9,600	60	Yes
Lake Bryan	W59-95V	14 Nov	1:20,000	60	Yes
Lake Bryan	W59-95V	30 Nov	1:20,000	60	Yes
1960 Snake River					
Lower Granite Lake—Low Altitude	W60-8	1 Dec	1:9,600	60	Yes
Lower Granite Lake—Low Altitude	W60-9	13 Dec	1:9,600	60	Yes
1991 Snake River					
RM 0.0 to Lower Monumental Dam	W91-03	30 Aug	1:24,000	60	Yes
1992 Snake River					
Lower Monumental Dam to Asotin	W92-12	19 Apr	1:24,000	60	Yes

3. Map Presentations

3.1 Survey Drawing Displays

The 1934 mapping found in Annex A is a subset of the entire mapping collection. Only 131 sheets were selected to represent the LSRP, starting at the mouth of the Snake River to a point above Asotin, WA. An index map in the front of the collection helps the reader select sheets of interest.

3.2 Pre- and Post-Dam Comparison Displays

A total of 22 pre- and post-dam comparison displays have been compiled and are found in Annex B. Each display is of a particular geographic location on the lower Snake River. Aerial photography from 1958, 1991, and 1992 are compared showing pre- and post-dam shorelines along with post-dam shoreline superimposed on the 1958 photo. In addition, up to three oblique photos, taken between 1958 and 1960, are presented with a relationship to the 1958 aerial photo. For those locations where fewer than three photos are available, there is a blank area on the sheet. There are six displays from the river and reservoir between Ice Harbor and Lower Monumental Dams, seven displays between Lower Monumental and Little Goose Dams, eight displays between Little Goose and Lower Granite Dams, and one display from Lower Granite Dam to Clarkston.